

# DNA Pro series

## 20K4 • 10K4



The culmination of five years intensive effort, the Danley Sound Labs DNA series amplifiers represent the leading edge of amplifier design. In a straightforward robust package, they surpass similar products in power delivery, sonic performance and efficiency.

Spanning 10,000 to 20,000 Watts RMS output power, all models share a high end specification with generous power reserves. The integrated state of the art DSP being the perfect complement to the world's finest loudspeaker systems.

This truly revolutionary amplifier platform provides a logical front panel user interface and powerful Ethernet based remote control. Both provide access to all features allowing rapid system configuration with full performance monitoring and analytics.



- Four channels of sonically pure Class D amplification
- Unique, precise digital signal processing
- Over designed switch mode power supply
- 10,000 & 20,000 watts RMS total output
- Analog, AES3 and Dante™ digital network audio inputs
- Full front panel user interface
- Ethernet network software for system operation and monitoring
- DSP Drive Modules for loudspeaker processing
- Powerful grouping for multi-layer EQ and effective control of large systems

# DNA Pro series

20K4 • 10K4




## General Specifications

Amplifier topology	Class D
Number of channels	Four
Total power output, all channels driven	20,000 and 10,000 Watts RMS
Audio inputs	4x Analog, 2x AES3 and 4x Dante™ (factory fitted option)
Digital Signal Processing	High performance DSP processing on all inputs and outputs
Control, monitoring and system status alarms	Ethernet network Volt-free relay and contact closure port
Power-save modes	Standby after user defined time, instant wake up on audio (less than 1ms) Deep ECO sleep after user defined time, wake up on command (2-3 seconds)
System sleep and wakeup	Front panel switch, network command and audio detection

## Power Output

Model	20K4	10K4
Power specification	RMS output power per channel, all channels driven with continuous program material and a nominal ambient temperature of 40degC / 105degF	
Crest Factor of 4 (12dB), 2-Ohm nominal load	5,000W	2,500W
Crest Factor of 2.8 (9dB), 4-Ohm nominal load	2,600W	1,300W
Crest Factor of 2 (6dB), 8-Ohm nominal load	1,300W	700W
Bridged, per channel pair, 4-Ohm nominal load	10,000W	5,000W
70V / 100V line operation, Crest Factor 4 (12dB)	5,000W Hi-Z, 70V/100V	2,500W Hi-Z, 70V/100V

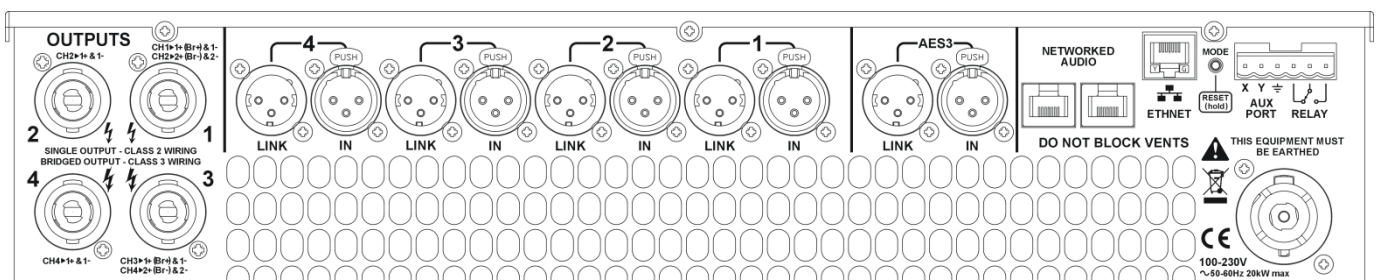

# DNA Pro series

20K4 • 10K4



## Audio Performance

Amplifier topology	Proprietary Class D
Amplifier modulation scheme	Low feedback, multiple loop, with feed-forward error correction
Dynamic range to amplifier output	Analogue input, better than 113dBA typical AES / Dante™ input, better than 114dBA typical
Frequency response, 4 Ohm load	+/- 0.5dB, 5Hz to 20kHz -2.5dB, below 3Hz to beyond 30kHz
Total harmonic distortion, THD	<0.05% typical, 1kHz signal, AES17 filter, 4 Ohm load
Inter-channel crosstalk, worst case combination	better than -85dBr at 1kHz and -75dBr at 10kHz
Maximum analogue input level	+20dBu
Analogue input sensitivity range for full output	0dBu to +20dBu, continuously adjustable
Analogue input and link	Input 20k Ohm, electronically balanced, link directly connected to analogue input
Analogue ground scheme	AES48 standard compliant
AES3 input	Transformer isolated with unique active cable equalisation for extended range
AES3 link	Active AES3 signal regeneration. Automatic direct bypass to the AES3 input ensuring the audio signal will still flow even when the amplifier is powered down
AES3 supported sampling rates	24kHz to 192kHz (auto locking)

## Digital Signal Processing

Resolution	40 bit, proprietary algorithms
Sample rate	96kHz throughout
Physical inputs to DSP drive modules	4x analog, 2x AES & 4x Dante™ inputs can be routed to four DSP drive modules
Drive module input processing	Input signal routing, delay, gain, HPF, Phase, Mute <b>EQ:</b> 2x low shelf, 6x PEQ / band pass and FIR shelving filters
Drive module output processing	Source, delay, gain, Phase, Mute, crossover filters, VX limiters <b>EQ:</b> low shelf, 8x PEQ / band pass and FIR shelving filters
Preset management	8 snapshots for device wide setup, 50 presets for loudspeaker settings Presets can be recalled to sets of outputs or individual outputs as required
<b>Unique high performance processing</b>	
Overlays	Twelve additional independent overlays of EQ, Delay and Gain Flexible grouping for effective control of many amplifier channels in large systems
Class leading VX limiters	See the 'speaker protection systems' section
Hardman crossover filters	Better out of band rejection than Linkwitz-Riley
LIR crossover filters	Linear Phase without the compromises of FIR filters

## Power Supply

Topology (main power supply)	3rd generation Series Resonant
Topology (auxiliary and standby supplies)	Low quiescent Eco-Flyback
Internally stored energy	>700 Joules
Nominal mains input voltage range	85V to 240V Power supply automatically detects voltage and configures accordingly
Mains input frequency range	47Hz to 63Hz
Mains inrush current (max for <10ms)	12A at 115V and 6A at 230V

# DNA Pro series

20K4 • 10K4



Sleep Mode:	Input	Thermal Dissipation		Input Current
	<i>Watts</i>	<i>Btu/hr</i>	<i>Kcal/hr</i>	<i>Amps</i>
230V	6.2	21	5.3	.23
115V	4.5	15	3.87	.14

Standby Mode:	Input	Thermal Dissipation		Input Current
	<i>Watts</i>	<i>Btu/hr</i>	<i>Kcal/hr</i>	<i>Amps</i>
230V	61	208	52.5	.53
115V	60	205	51.6	.78

Ready Mode:	Input	Thermal Dissipation		Input Current
	<i>Watts</i>	<i>Btu/hr</i>	<i>Kcal/hr</i>	<i>Amps</i>
230V	258	880	222	1.9
115V	242	826	208	3

Full Power:	Input	Thermal Dissipation		Input Current
	<i>Watts</i>	<i>Btu/hr</i>	<i>Kcal/hr</i>	<i>Amps</i>
230V	3000	10236	2580	18
115V	3000	826	208	36

## Protections Systems

Under all circumstances the control and protection systems will endeavour to deliver the maximum power possible for a given set of conditions, applying limiters only in extreme circumstances. Muting will only occur when a dangerous situation is detected, normal operation automatically resuming when the condition clears.

System protection	Speaker protection
Excessive power supply current or amplifier output current	Audio soft-clip limiter
Excessive temperature per sub system: PSU, amplifier and DSP	DC offset protection
Mains voltage within acceptable limits	Excessive HF energy (VHF) limiter
Internal power rails producing correct output	
Fans operating at correct speed	VX output limiters
	Vx provides a linear phase virtual crossover and two limiter paths on each output. This unique system delivers effective protection of speakers with passive crossovers.
Power distribution protection systems	Vx Limit    Multiband peak limiter, two per output
Mains inrush current limiting for soft start and anti-surge	Vx Max    Multiband overshoot limiter, two per output
Mains average current limiting for mains breaker management	X-Max    Driver excursion limiter
Randomised initialisation when remotely commanded to power up	T-Max    Driver thermal limiter (long term power limiter)
Monitoring, measurements recorded against time	Monitoring, device statistics and counters
Supply current	Number of power cycles counted
Supply voltage	Number of mains brownout events counted
Thermal Capacity	Fan speeds continuously monitored
Each driver current	Fan under-speed events counted

# DNA Pro series

20K4 • 10K4



Each driver impedance	Various protection mute events counted
Protection limiting for each output	Driver Impedance continuously monitored
An inbuilt alarm and notification system to indicate problems to remote devices either via the network or the Volt-free changeover relay contacts accessibly on the rear panel.	

## Physical

Cooling	Dual vari-speed fans, front to back airflow. Washable, tool less change filter media.
Analogue IN and LINK	4x female and 4x male Neutrik™ XLR
AES3 dual channel IN and LINK	1x female and 1x male Neutrik™ XLR
Amplifiers output	4x Neutrik Speakon™ NL4 connectors
Mains input connector	Neutrik 32A Powercon™
Dante Primary and Secondary	2x Shielded RJ45
Relay output & contact closure inputs	Phoenix pluggable terminal block (supplied)
Front panel display (backlit)	Graphical, high contrast, daylight visible
Front panel encoders	Two, indented, velocity sensitive
Front panel push buttons	Large, tactile, illuminated
LED indicators	Bright, easily differentiated
Enclosure	Standard 19" 2U (88mm), 357mm (14") deep with handles and optional rear support
Net Weight	12.5kg (27.5 pounds).