

The THmini was designed with the small band/weekend warrior in mind; who in most cases must setup and tear down on their own with nothing more than a hand truck.



Simply but boldly stated, there is no other product on the market today which matches the Mini's level of performance and fidelity in a sub-compact size. Multiples may be used for bass arrays.

Specifications

- Operating Frequency Range 48 Hz - 200 Hz - 3 dB
..... 41 Hz -10dB
- Sensitivity @ 1M 101 dB SPL
..... (Referenced to 2.83V @ 1M ½ space, measured as 28.3V @ 10M)
- Maximum Output..... 129 dB SPL/135 dB SPL Peak
- Input Power Ratings..... 700 W continuous, 2800 W Peak
- Nominal Impedance 8 ohms
- Minimum Impedance..... 7 ohms @ 50 Hz
- Recommended Processing 40 Hz HP @ 24 dB/Butterworth
- Drivers LF 1 x 12" Long excursion
- Input Connections 2-NL4MP
- Enclosure Material 13ply, 18mm Baltic Birch, polyurea coated

THmini

Extremely Compact Subwoofer

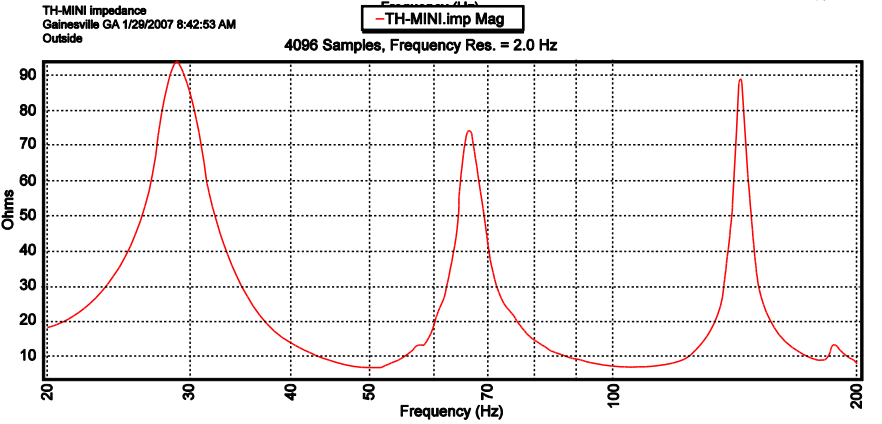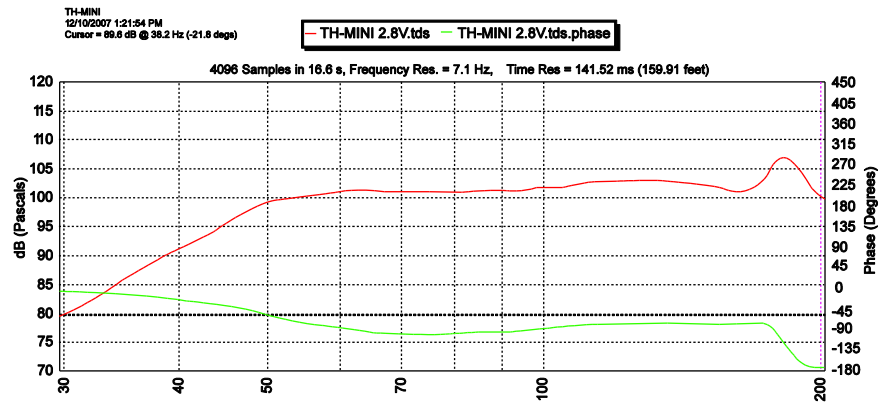

Accessories

Available Touring or Install
Weatherized options available

PERFORMANCE DATA

Model	Max SPL	Sensitivity	Magnitude Response	Power Rating	Dimensions (in.)	Weight
THMINI	135 dB	101 dB	48 Hz – 200 Hz	1,400 W	24 x 15 x 22.5	76 lbs

Architect/Engineers Specs

The subwoofer loudspeaker shall utilize one 12" long excursion transducer in a patent-pending enclosure. The subwoofer shall have an operating range of 48 Hz- 200 Hz - 3 dB with sensitivity of 101 dBSPL, 129 dBSPL/135 dBSPL peak. Power handling shall be 700 Watts continuous, 1400 Watts program. The impedance shall be nominal 8 ohms.

The loudspeaker shall be constructed of 13 ply Baltic birch, water resistant Polyurea coated, properly braced for the intended use and a rugged steel grill. The connectors shall be Neutrik NL4. The Loudspeaker shall be the Danley Sound Labs TH MINI.