

SYNERGY HORN FULL RANGE LOUDSPEAKERS



The SH-100 full range loudspeaker is a two-way Synergy Horn. When broader dispersion is needed this device handles the job flawlessly. It is an excellent choice for distributed systems due to its superior pattern control, frequency response and overall fidelity. Pole cup allows for portability and fits most tripods.

Specifications

Coverage Pattern..... 110° conical
 Operating Frequency Range..... 70 Hz - 20 kHz +/- 3 dB
 50 Hz - 24 kHz -10 dB
 Sensitivity @ 1M 95 dB SPL
 (Measured as 2.83V input, 1M whole space)
 Maximum Output..... 120 dB SPL Cont., 126 dB SPL Program
 Input Power Ratings 300W continuous, 600W program
 Nominal Impedance 8 ohms
 Minimum Impedance..... 5 ohms @ 7 kHz
 Recommended Processing..... 70 Hz HP @ 24 dB/Butterworth
 Drivers 1 x 8" coaxial
 Input Connections..... 2-NL4MP
 Enclosure Material..... 13ply, 18mm Baltic Birch, polyurea coated

SH-100

Wide dispersion
 with high fidelity
 and great pattern
 control

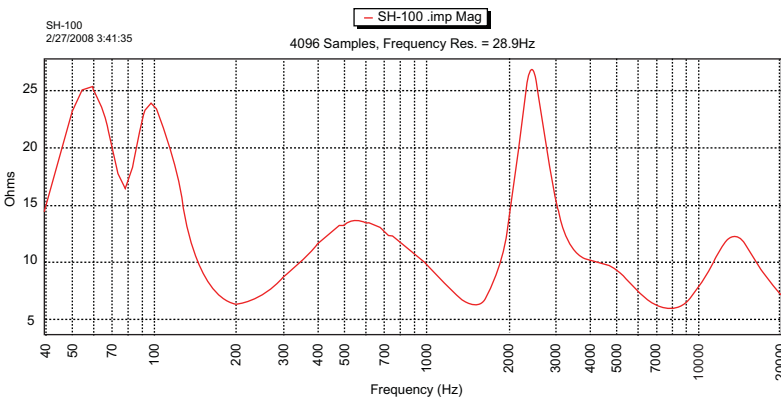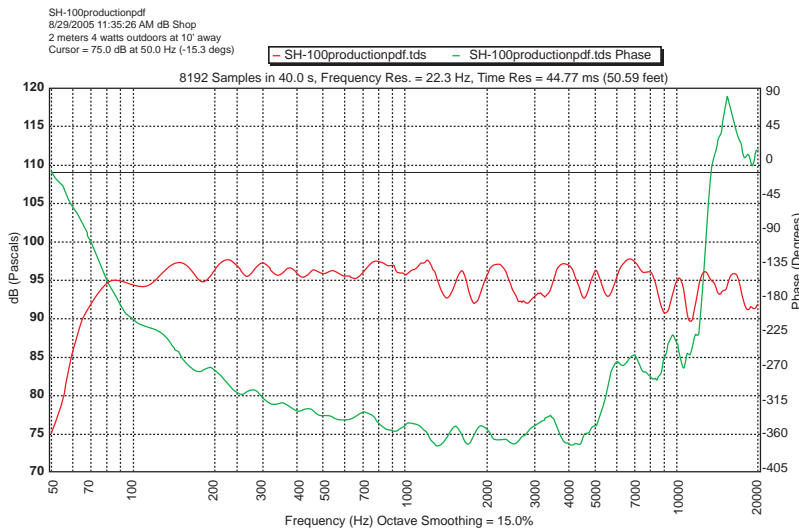

Accessories

Powered version available
 U-Bracket & Swivel adapter
 Weatherized options available

PERFORMANCE DATA

Model	Max SPL	Sensitivity	Magnitude Response	Beam Width	Power Rating	Dimensions (in.)	Weight
SH 100	126 dB	95 dB	70 Hz - 20 kHz	110° conical	600 W	20.5 x 20.5 x 9	45 lbs

Architect/Engineers Specs

The loudspeaker shall utilize one 8" coaxial transducer in a patent-pending enclosure. The coverage pattern shall be 110° conical. The loudspeaker shall have an operating range of +/- 3 dB 70 Hz – 20 kHz. Sensitivity of 95 dB SPL @ 1m. Output of 120 dB SPL/126 dB SPL Peak. Power handling shall be 300 Watts continuous, 600 Watts program. The impedance shall be nominal 8 ohms.

The loudspeaker shall be constructed of 13 ply Baltic birch, water resistant Polyurea coated, properly braced for the intended use and a rugged steel grill. The connectors shall be Neutrik NL4. The Loudspeaker shall be the Danley Sound Labs SH-100.