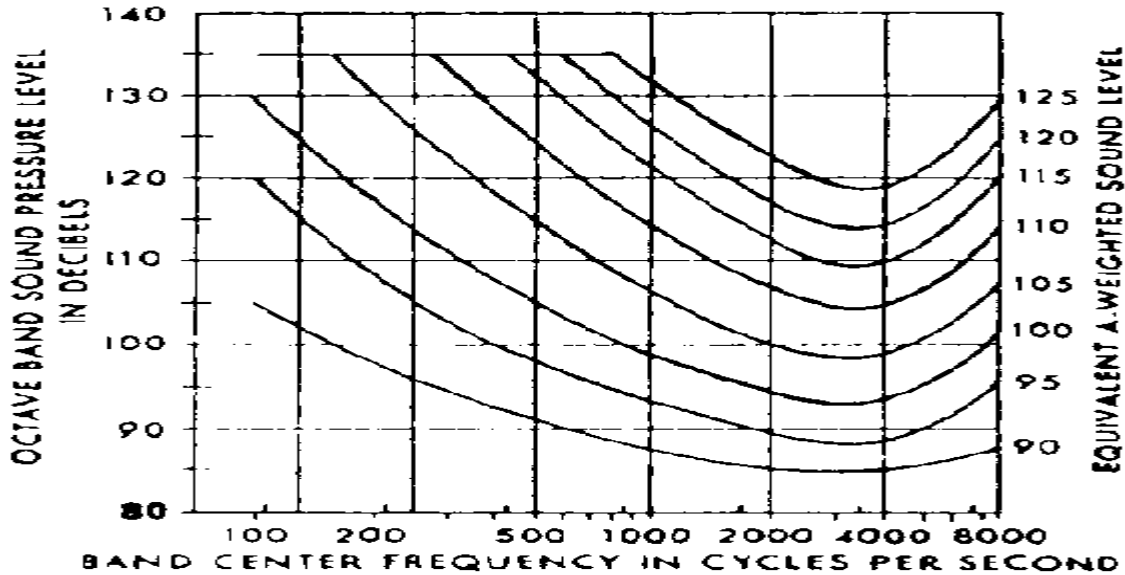


**Healthy Listening Guide**

**Danley Sound Labs strongly urges those who use our products to strictly adhere to the OSHA guidelines outlined in Regulations (Standards - 29 CFR) Occupational noise exposure. - 1910.95. Failure to follow these guidelines can result in permanent hearing damage. It is the responsibility of the users of our products to operate them in a safe manner. When in doubt, turn it down!**



**FIGURE G-9**

Equivalent sound level contours. Octave band sound pressure levels may be converted to the equivalent A-weighted sound level by plotting them on this graph and noting the A-weighted sound level corresponding to the point of highest penetration into the sound level contours

**TABLE G-16 - PERMISSIBLE NOISE EXPOSURES (1)**

Duration per day, hours	Sound level dBA slow response
8.....	90
6.....	92
4.....	95
3.....	97
2.....	100
1 1/2 .....	102
1.....	105
1/2 .....	110
1/4 or less.....	115

Exposure to impulsive or impact noise should not exceed 140 dB peak sound pressure level.