

TAPPED HORN COMMERCIAL PRO SUBWOOFERS

The TH-Mini was designed with the small band/weekend warrior in mind; who in most cases must setup and tear down on their own with nothing more than a hand truck.



Simply but boldly stated, there is no other product on the market today which matches the Mini's level of performance and fidelity in a sub-compact size. Multiples may be used for bass arrays.

Specifications

Operating Frequency Range..... 48 Hz - 200 Hz - 3 dB
41 Hz -10dB
 Sensitivity @ 1M 101 dBSPL
 (Referenced to 2.83V @1M ½ space, measured as 28.3V @ 10M)
 Maximum Output 129 dBSPL/135 dBSPL Peak
 Input Power Ratings 700 W continuous, 1400 W program
 Nominal Impedance 8 ohms
 Minimum Impedance 7 ohms @ 50 Hz
 Recommended Processing..... 40 Hz HP @ 24 dB/Butterworth
 Drivers LF 1 x 12" Long excursion
 Input Connections..... 2-NL4MP
 Enclosure Material..... 13ply, 18mm Baltic Birch, polyurea coated

TH-Mini

Extremely Compact
Subwoofer

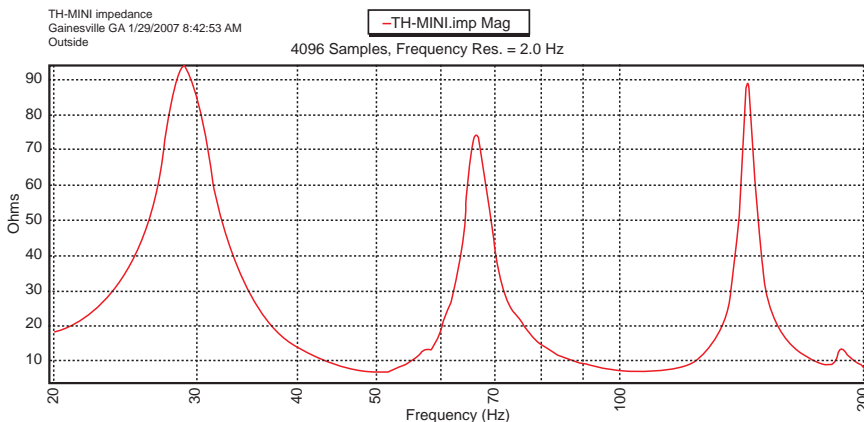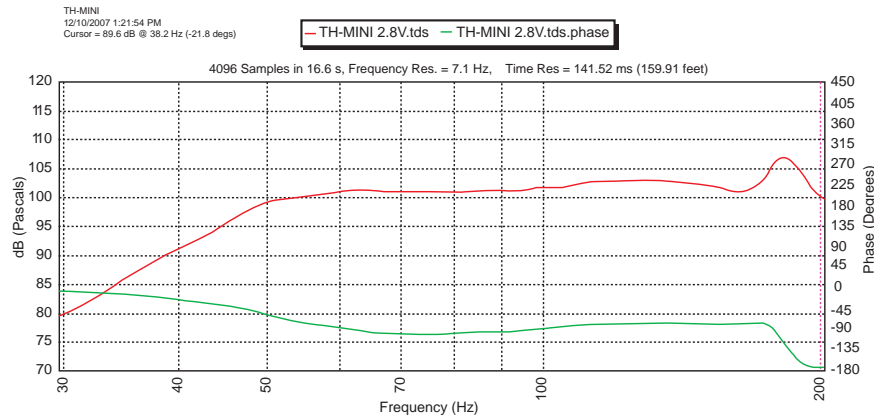

Accessories

Available Touring or Install
Weatherized options available

PERFORMANCE DATA

Model	Max SPL	Sensitivity	Magnitude Response	Power Rating	Dimensions (in.)	Weight
TH MINI	135 dB	101 dB	48 Hz – 200 Hz	1,400 W	24 x 15 x 22.5	76 lbs

Architect/Engineers Specs

The subwoofer loudspeaker shall utilize one 12" long excursion transducer in a patent-pending enclosure. The subwoofer shall have an operating range of 48 Hz- 200 Hz - 3 dB with sensitivity of 101 dBSPL, 129 dBSPL/135 dBSPL peak. Power handling shall be 700 Watts continuous, 1400 Watts program. The impedance shall be nominal 8 ohms.

The loudspeaker shall be constructed of 13 ply Baltic birch, water resistant Polyurea coated, properly braced for the intended use and a rugged steel grill. The connectors shall be Neutrik NL4. The Loudspeaker shall be the Danley Sound Labs TH MINI.