



The TH-212 commercial pro subwoofer is designed for any application that needs massive punch but light weight and easy portability. Interlocking skids allow the 212 to be stacked into multiples which produce stunning output and low frequency directivity. Removable covers allow 2 choices for the location of the acoustical output – depending on the installation orientation you choose. Waterproof drivers are standard on all 212's.

Available in both Touring and Install versions - touring version comes with handles and wheels to make it easily transportable, install version has a variety of fly-points for permanent installations. A self-powered model is also available with a built in DSP.

Specifications

- Operating Frequency Range.....38 Hz - 200 Hz +/- 3 dB
-31 Hz – 200 Hz -10 dB
- Sensitivity @ 1M 104 dB SPL
- (107.8dB@ 81 Hz)
- (Referenced to 2.83V @1M ½ space, measured as 28.3V @ 10M)
- Maximum Output.....133dB SPL/139dB SPL Peak
- Input Power Ratings 1400W continuous, 2800W program
- Nominal Impedance 4 ohms
- Minimum Impedance.....3.6 ohms @ 36 Hz
- Recommended Processing..... 30 Hz HP @ 24 dB/Butterworth
- Drivers LF 2 x 12" Long excursion
- Input Connections..... 2-NL4MP
- Enclosure Material..... 13ply, 18mm Baltic Birch, polyurea coated

TH-212
Lightweight,
Easy Portability

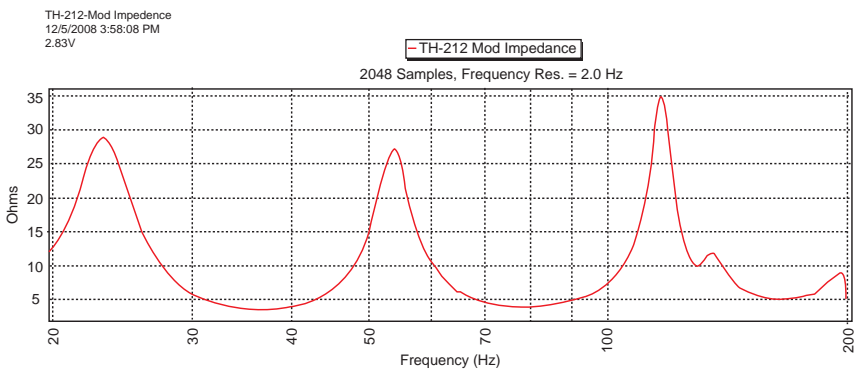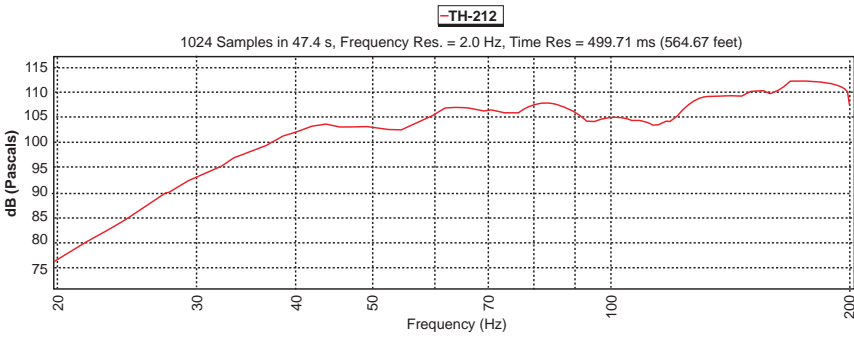

Accessories

Powered version available
Weatherized options available

PERFORMANCE DATA						
Model	Max SPL	Sensitivity	Magnitude Response	Power Rating	Dimensions (in.)	Weight
TH 212	139 dB	104 dB	38 Hz – 200 Hz	2,800 W	36 x 15 x 36	142 lbs

Architect/Engineers Specs

The subwoofer loudspeaker shall utilize two 12" long excursion transducers in a tapped-horn (patent-pending) enclosure. The subwoofer shall have an operating range of - 3 dB 38 Hz – 200 Hz with sensitivity of 104 dB SPL, 107.8 dB SPL at 81 Hz. 133/139 dB max SPL. Power handling shall be 1400 W continuous, 2800W Program. The impedance shall be nominal 4 ohm.

The loudspeaker shall be constructed of 13 ply Baltic birch, water resistant Polyurea coated, properly braced for the intended use. The connectors shall be Neutrik NL4. The subwoofer loudspeaker shall be the Danley Sound Labs TH-212.