

SPECIFICATIONS

KEY FEATURES:

- ▶ Wide Coverage Area
- ▶ Compact size
- ▶ Sentinel™ Limiter protection circuitry
- ▶ U-Bracket included




APPLICATIONS:


- ▶ Portable/Touring Sound System
- ▶ Houses of Worship
- ▶ Performing Arts Centers
- ▶ Sports Facilities
- ▶ Theme Parks
- ▶ Clubs / Restaurants
- ▶ Cruise Ships / Yachts
- ▶ Schools

Operating Frequency Range ----- 123 Hz – 14.85 kHz - 6 dB
 Sensitivity -----90 dBSPL measured in half space at 1M @ 2.83V input
 Maximum Output----- 103 dBSPL Cont., 109 dBSPL Peak
 Recommended Amplifier Power ----- 20 Watts Cont., 80 Watts Peak
 Drivers ----- 1 x 3”
 Input Connections ----- Input Terminal strip w/ 8 ohm and 70V taps
 Impedance ----- 8 ohm, 70V taps 20, 10, 5 watts
 Enclosure Material ----- High Density Polyethylene

Nano response
4/4/2017 6:16:09 PM

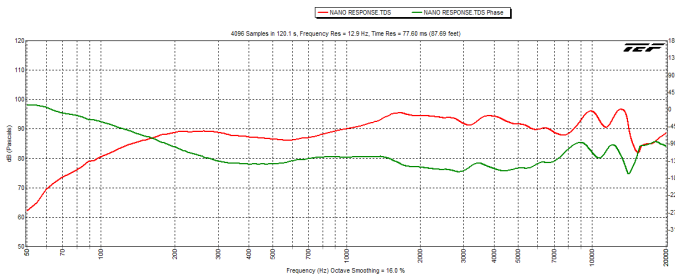

Nano impedance
4/2/2017 10:20:42 PM

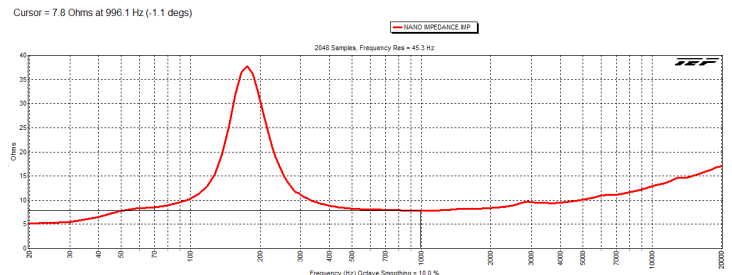

Performance Data

Model	MAX SPL	Sensitivity	Magnitude Response	Beam Width	Power Rating	Dimensions	Weight
Nano	109 dB	90 dB	123 Hz - 14.85 kHz	110° Conical	40W	6”H x6”W x 6”D	4 lbs