
BASS HORN COMMERCIAL PRO SUBWOOFERS

The BC 218 is the newest member of the BC family of subwoofers from Danley Sound Labs. The BC218 utilizes 2 powerful 18" drivers in a pair of horns which share a single exit. The BC or Boundary Coupled subwoofer is a new class of subwoofer, delivering not only high efficiency and power handling but actual directivity. The BC family of subwoofers will stand up to the most demanding of applications. With lots of low end, a low box count and few amp channels, the Danley Sound Labs BC is the box of choice.

BC218 The new standard in subs.

Specifications

Operating Frequency Range	
Sensitivity @ 1M	
(Referenced to 2.8	3V @1M ½ space, measured as 28.3V @ 10M)
Maximum Output	142 dBSPL/148 dBSPL Peak
	148 dBSPL/154 dB SPL Peak @ 68 Hz
Input Power Ratings	
Nominal Impedance	2x8 ohm
Minimum Impedance	
Recommended Processing	
Drivers	LF 2 x 18" Long excursion
Input Connection	2-NL4MP - LF 1 pin 1, LF 2 pin2
Enclosure Material	13ply, 18mm Baltic Birch, polyurea coated

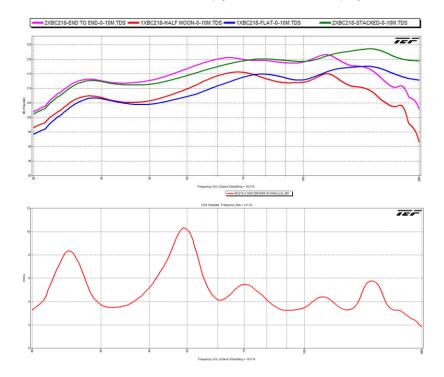





Accessories

Cabinet Dolly Weatherized options available Custom color/finishes available

PERFORMANCE DATA									
M	odel	Max SPL	Sensitivity	Magnitude Response	Power Rating	Dimensions (in.)	Weight		
BC	C218	148 dB	110 dB	22 Hz – 185 Hz	6,800 W	60 x 60 x 30	511lbs	Ī.	

© 2013 Danley Sound Labs. All Rights Reserved.

www.danleysoundlabs.com

Architect/Engineers Specs

The subwoofer loudspeaker shall utilize two 18" long excursion transducers in a unique bass horn enclosure. The subwoofer shall have an operating range of - 3 dB 26 Hz – 150 Hz with sensitivity of 110 dBSPL, 116 dBSPL @ 68 Hz. Maximum output 142/148 dBSPL Peak, 148/154 dBSPL @ 68 Hz. Power handling shall be 3,400 W continuous, 13,600 W Peak. The impedance shall be nominal dual 2x8 ohm impedance.

The loudspeaker shall be constructed of 13 ply Baltic birch, water resistant Polyurea coated, properly braced for the intended use. The connectors shall be two Neutrik NL4. The subwoofer loudspeaker shall be the Danley Sound Labs BC218.