

## SYNERGY HORN FULL RANGE LOUDSPEAKERS

The SM-96 combines great fidelity, low frequency pattern control and unrivaled Magnitude/phase response into an ultra-compact enclosure. It has the added benefit of truly modular array-ability.

Available in both Touring and Install versions - touring version comes with handles to make it easily transportable and pole cup allows for portability and fits most tripods.

### Specifications


Coverage Pattern .....90° horizontal x 60° vertical  
 Operating Frequency Range.....55 Hz - 24 kHz +/- 3 dB  
 ..... 42 Hz - 26 kHz -10 dB  
 Sensitivity @ 1M ..... 98 dB SPL  
 ..... (Measured as 2.83V input, 1M whole space)  
 Maximum Output .....124 dB SPL Cont., 130 dB SPL Program  
 Input Power Ratings ..... 800W continuous, 1600W program  
 Nominal Impedance ..... 4 ohms  
 Minimum Impedance ..... 3.4 ohms @ 137 Hz  
 Recommended Processing..... 55 Hz HP @ 24 dB/Butterworth  
 Drivers .....LF 2 x 8", MHF 1 x 5" Coaxial  
 Input Connections..... 2-NL4MP  
 Enclosure Material ..... 13ply, 18mm Baltic Birch, polyurea coated

# SM-96


Synergy Horn  
 Performance in an  
 Ultra-Compact Box



SM96  
 3/16/2011 4:09:41 PM Danley shop

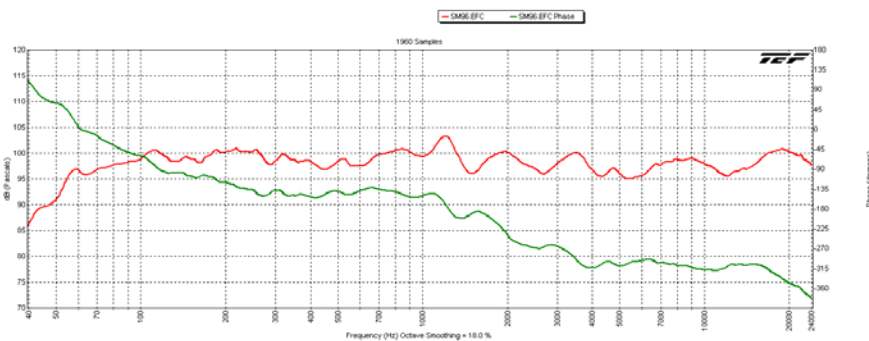

SM96 impedance  
 Danley Shop 3/16/2011 4:33:36 PM

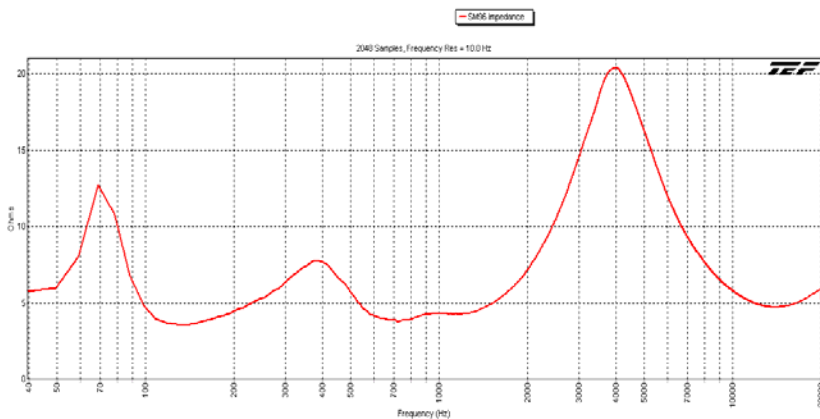

### Accessories

- Powered version available
- Mounting brackets for array
- MB 50 Fly-ware
- Speaker Cover
- Weatherized options available

### PERFORMANCE DATA

Model	Max SPL	Sensitivity	Magnitude Response	Beam Width	Power Rating	Dimensions (in.)	Weight
SM 96	130 dB	98 dB	55 Hz - 24 kHz	90° x 60°	1,600 W	31.5 x 21 x 15.5	73 lbs

### **Architect/Engineers Specs**

The loudspeaker shall utilize the Synergy Horn/Tapped Horn patent-pending enclosure covering three pass bands. The coverage pattern shall be 90° horizontal x 60° vertical. The loudspeaker shall have an operating range of +/- 3 dB 55 Hz – 24 kHz. Sensitivity of 98 dB SPL @ 1m. Output of 124 dB SPL/130 dB SPL Peak. Power handling shall be 800 Watts continuous, 1600 Watts program. The impedance shall be nominal 4 ohms.

The loudspeaker shall be constructed of 13 ply Baltic birch, water resistant Polyurea coated, properly braced for the intended use and a rugged steel grill. The connectors shall be Neutrik NL4. The Loudspeaker shall be the Danley Sound Labs SM-96.