


# AXS 1K3 3 Channel, 1,000W power amplifier

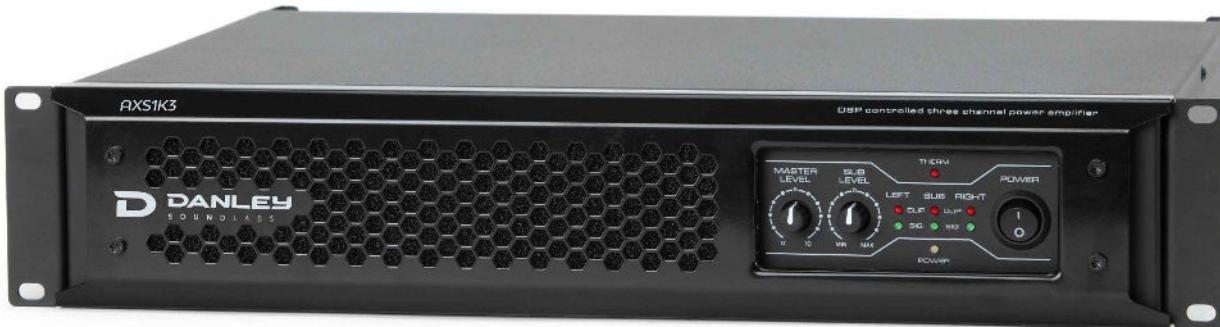

The AXS1K3 is a state-of-the-art digital power amplifier designed for professional system integrators requiring maximum performance, reliability, and sound quality in modern commercial installations. Configured in a 2.1 architecture, the AXS1K3 enables rapid deployment in cafés, lounges, pubs, and similar venues, providing dedicated amplification for satellite loudspeakers and subwoofer channels within a single compact unit.

Built on a high-performance Class-D topology, the AXS1K3 delivers high efficiency, reduced heat generation, and substantial output capability. The amplifier incorporates a 1000 W capable output stage with a switching power supply, resulting in a lightweight, compact, and installation-friendly platform suitable for continuous high-demand operation.

The cooling system utilizes active, fan-controlled airflow common to all channels, with a front-to-back ventilation path ideal for rack mount environments. The amplifier includes a comprehensive suite of modern protection circuitry, including short-circuit, thermal, DC, and high-frequency loudspeaker protection, ensuring stable and safe operation under all load conditions.

A powerful internal DSP provides system tuning, crossover management and limiting. Programming is performed via a concealed USB port located behind the front panel; once configured, the USB connection is protected from unauthorized access. The AXS1K3 also supports External Gain and External Mute functions to meet diverse installation requirements. The system is fully compatible with Danley's VC-1 external volume controller, enabling remote gain adjustment from 0 to -60 dB relative to the preset system level. All DSP parameters and system configurations are managed through AXS-Control, an intuitive PC software package designed for fast setup and reliable daily operation.

# SPECIFICATIONS AXS 1K3

| PERFORMANCE               |   |
|---------------------------|---|
| Number of channels        | 3 class D                                   |
| RMS 4 Ohm                 | 2 x 300W + 1 x 500W                         |
| RMS 8 Ohm                 | 2 x 150W + 1 x 300W                         |
| Bridge mode               | Not Available                               |
| AC Power                  | 120VAC                                      |
| Frequency response        | 20-20kHz (+/- 0.5 dB)                       |
| Total harmonic distortion | 0.02% (1kHz, 8 Ohm)                         |
| Damping factor            | >200 (8 Ohm, 1kHz)                          |
| Signal-to-noise           | 96dB (unweighted)                           |
| Cooling                   | Forced front-to-back, including dust filter |

| PHYSICAL   |  |
|------------|--|
| Dimensions | H: 3.75" x W: 19" x D: 17.5" / 96 x 482 x 444 mm |
| Weight     | 26.5 lbs. / 12 kg                                |



To view product details or download additional specs or presets, please visit <https://www.danleysoundlabs.com>